



### Cadena de rodillos, paso largo (norma ISO 1275)

Código	Norma ISO	A mm.	B mm.	C mm.	D mm.	E mm.	F mm.	Carga de rotura Kg.
CRL1700	208A	25,40	7,95	7,92	17,80	3,96	12	1.700
CRL2000	208B	25,40	7,75	8,51	17	4,45	11,81	2.000
CRL2800	210A	31,75	9,53	10,16	21,80	5,08	15,09	2.800
CRL3900	212A	38,10	12,70	11,90	26,90	5,94	18,08	3.900



### Cadena de rodillos, tipo agrícola

Código	Norma ISO	A mm.	B mm.	C mm.	D mm.	E mm.	F mm.	Carga de rotura Kg.
CRA0S32	S32	29,21	15,88	11,43	26,7	4,47	13,5	2.000
CRA0S45	S45	41,40	22,23	15,24	38,1	5,74	17,3	3.500
CRA0S52	S52	38,10	22,23	15,24	38,1	5,74	17,3	3.500
CRA0S55	S55	41,40	22,23	17,78	38,1	5,74	17,3	3.500
CRA0C55	C550	41,40	20,20	16,70	34,8	7,13	19,0	5.100

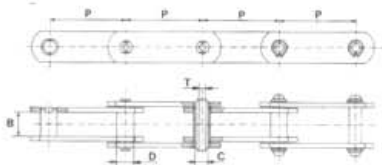

### Cadenas transportadoras DIN 8168 de ejes huecos

Código	Paso P mm.	Ancho inter. B mm.	ø eje C mm.	ø casquillo D mm.	ø eje hueco T mm.	Carga de rotura Kg.
MC28063	63	20	13	17,5	8,2	2.800
MC28080	80	20	13	17,5	8,2	2.800
MC28100	100	20	13	17,5	8,2	2.800
MC28125	125	20	13	17,5	8,2	2.800
MC28160	160	20	13	17,5	8,2	2.800
MC28200	200	20	13	17,5	8,2	2.800
MC56080	80	24	15,5	21	10,2	5.600
MC56100	100	24	15,5	21	10,2	5.600
MC56125	125	24	15,5	21	10,2	5.600
MC56160	160	24	15,5	21	10,2	5.600
MC56200	200	24	15,5	21	10,2	5.600
MC56250	250	24	15,5	21	10,2	5.600
MC11100	100	32	22	29	14,3	11.200
MC11125	125	32	22	29	14,3	11.200
MC11160	160	32	22	29	14,3	11.200
MC11200	200	32	22	29	14,3	11.200
MC11250	250	32	22	29	14,3	11.200
MC11315	315	32	22	29	14,3	11.200
MC22160	160	43	31	41	20,3	22.400
MC22200	200	43	31	41	20,3	22.400
MC22250	250	43	31	41	20,3	22.400
MC22315	315	43	31	41	20,3	22.400
MC22400	400	43	31	41	20,3	22.400
MC22500	500	43	31	41	20,3	22.400